


Technical Information

➔ Better games through innovation!

www.tab.at

Mounting instruction for TAB amplifier in Silverball Strato

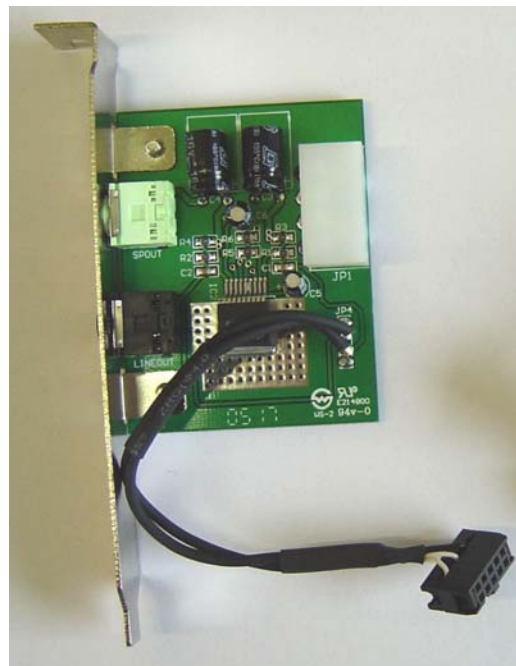

TAB-Austria Industrie- und Unterhaltungselektronik GmbH & CoKG

Haider Strasse 40, A-4052 Ansfelden

Tel.+43 (0)7229/78 040-0*, Fax +43 (0)7229/78 660, e-mail: sales@tab.at

Hotline: +43 (0)7229/78 040-250, e-mail: hotline@tab.at



TAB
AUSTRIA
www.tab.at

To operate the machine with the internal amplifier, follow these instructions below.

IMPORTANT:

Handling in the machine must be done in **power off mode** and **disconnected** power cable.

Required materials:


1x Amplifier TAB Partnumber: 471 221 763
1x LS Bridge Partnumber: 360 110 691
1x Mounting screw (lens head screw 3,5x6,5mm)

Required tools:

1x Screwdriver
1x Tweezers

Procedure:

1

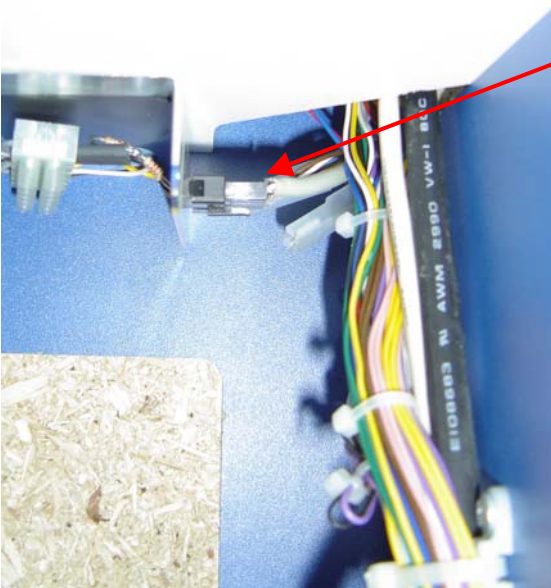


Disconnect this connection.



Step 1:

Disconnect the connection to the two Kemo amplifier.

2


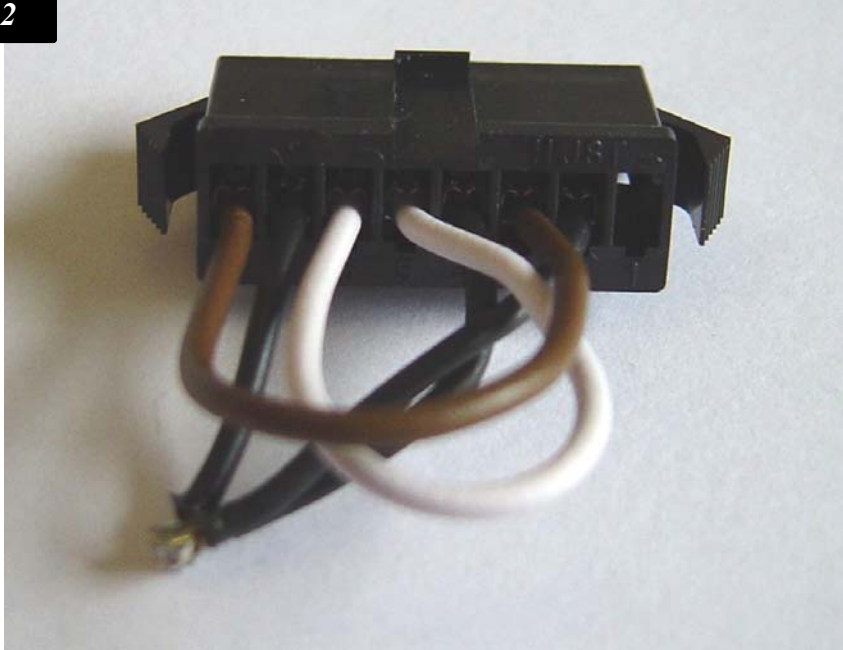


Step 2:
Connect the LS Bridge connector to the disconnected plug.

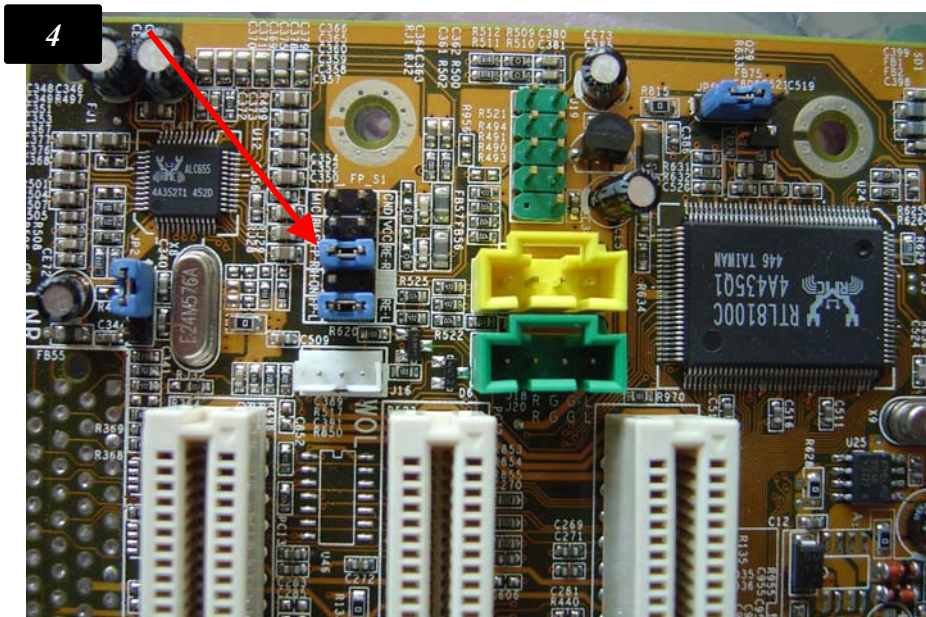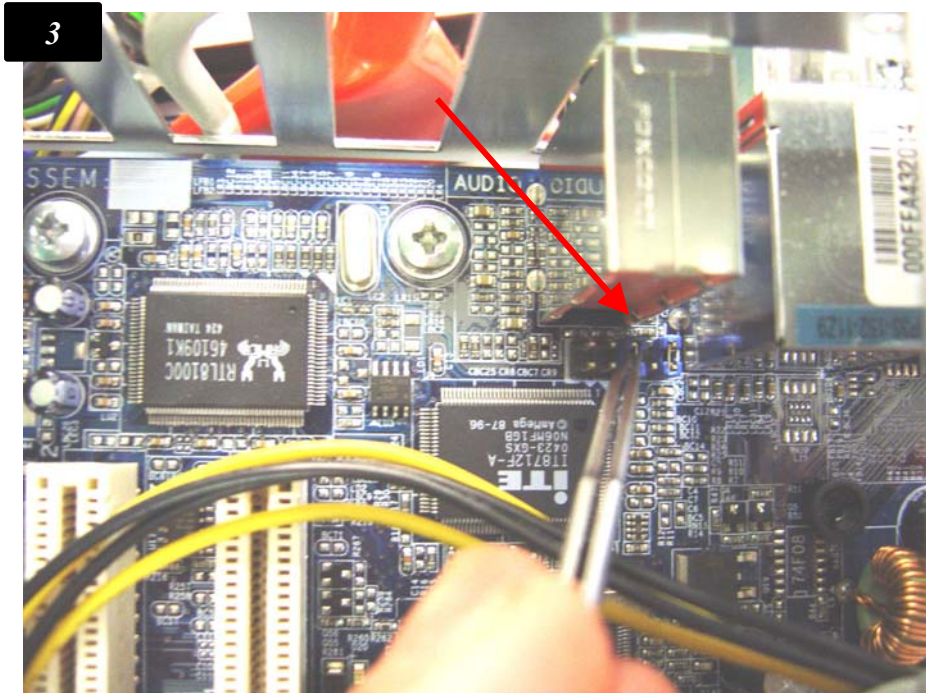

Step 3:
Remove the jumper Gigabyte motherboard (picture 3) and PC Partner motherboards (picture 4).




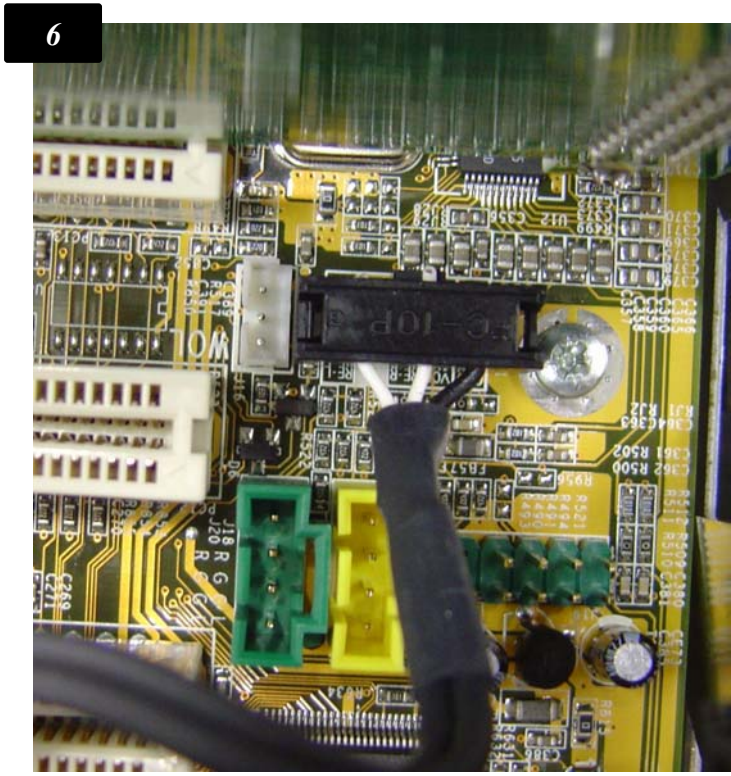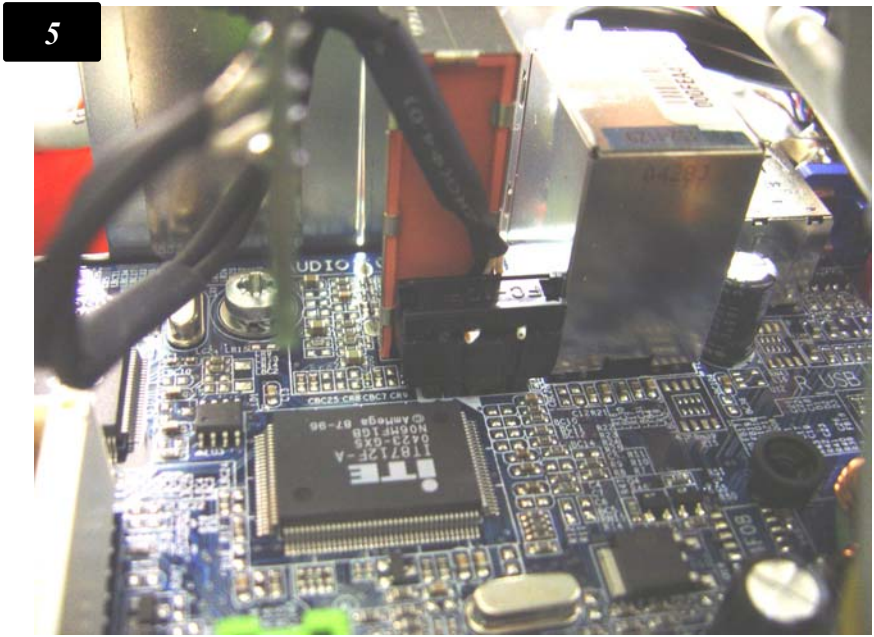

Step 4:
The connection from the amplifier will be connected to the motherboard.
Bild 5: Motherboard Gigabyte
Bild 6: Motherboard PC Partner



7

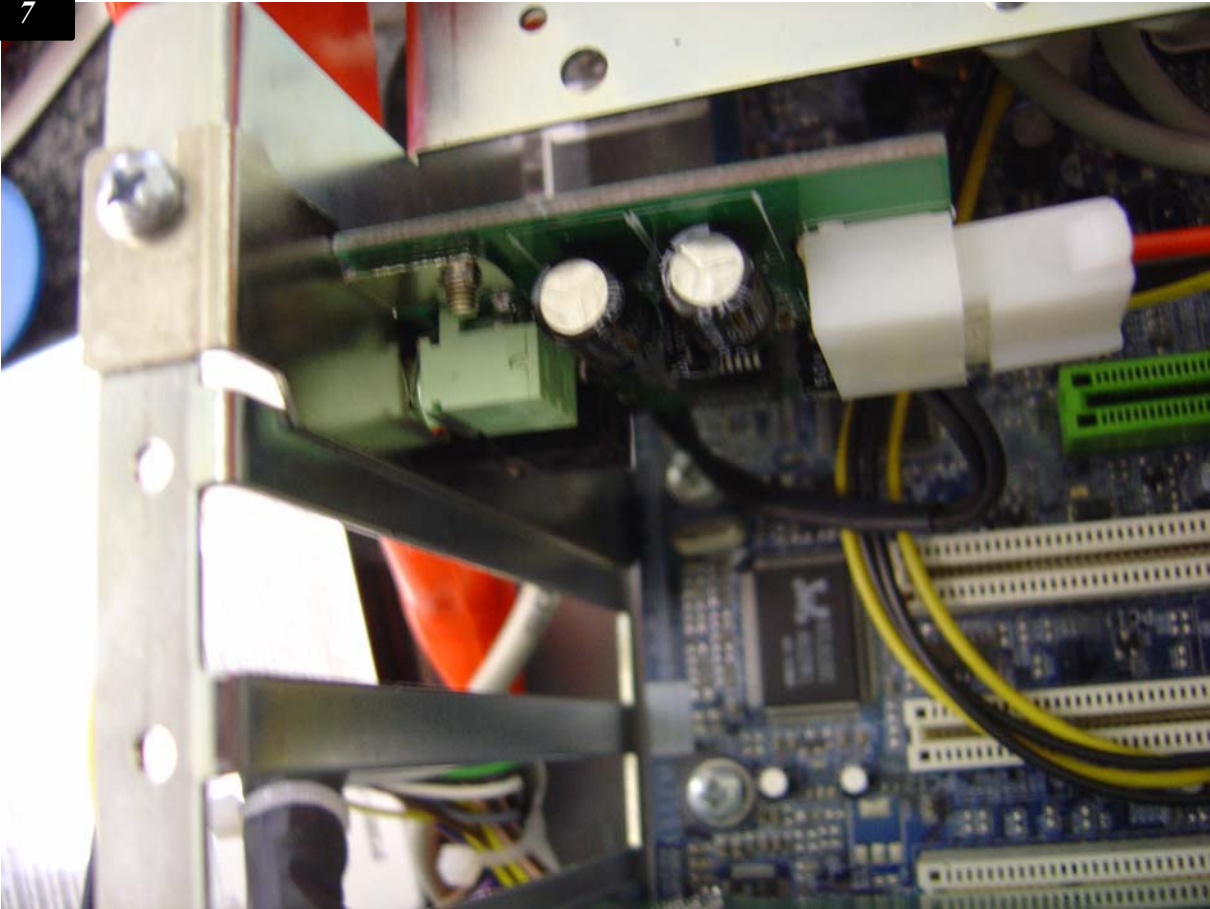

Step 5:


The amplifier will be mounted in a slot (picture 7) and with the power cable connected.

Step 6:

Connect the 3.5mm clinchcable to the new green output from the amplifier. The black output is an normal Line-out output .

Now the hardwarechanges are done. Turn on the machine and switch in the testmode from the machine.

In the menu under „**General**“ activate the checkbox „**with internal amplifier**“

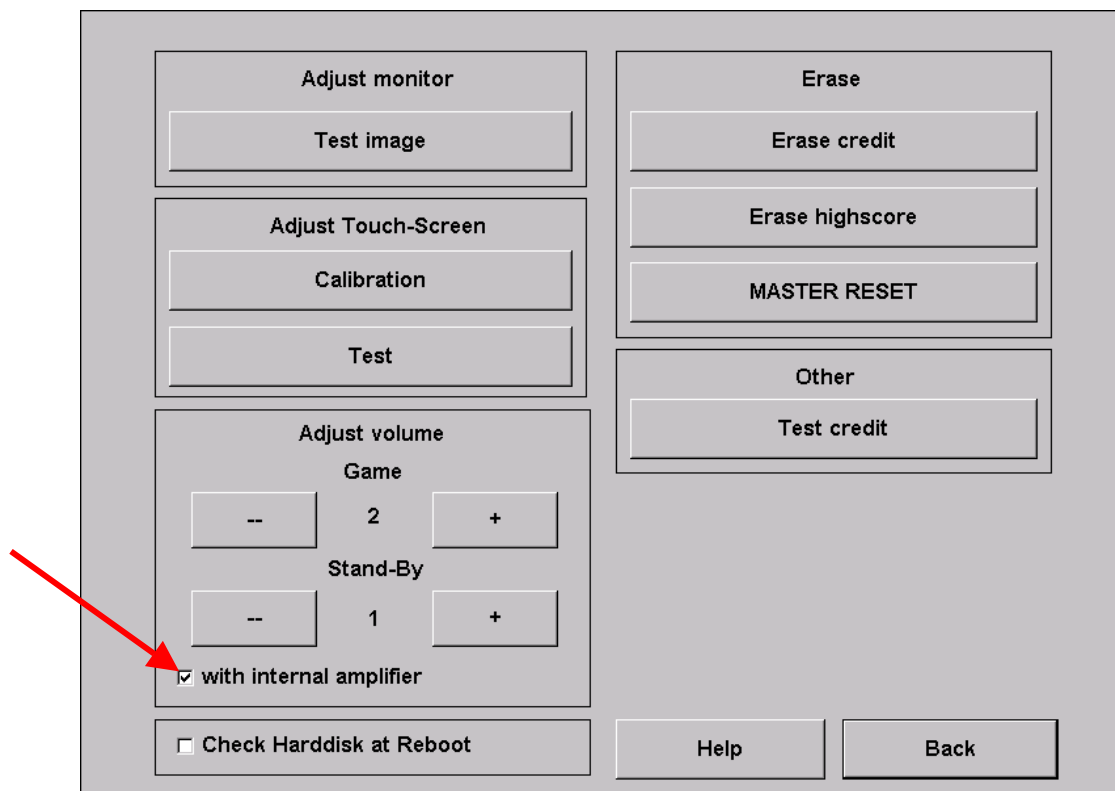



Notes:

If there are any more questions please call our hotline.

+43 / 72 29 / 78 0 40 - DW 250
www.tab.at / hotline@tab.at

