

## Alteration instruction Max Fire to version 3

### Index of contents:

- 1x dongle MAX FIRE Video version 3
- 1x update disk MAX FIRE version 3.01 or higher



Please note if the dongle ends with „3 m“, the letter before is specific for each country.


The update disk must have an identification number from version 3.01 or higher.

## 1. Remove from the dongle

You need:

1 x dongle MAX FIRE video version 3

- Turn off your MAX FIRE
- Pull down the PC, so that the ports look to your side
- Remove the old dongle

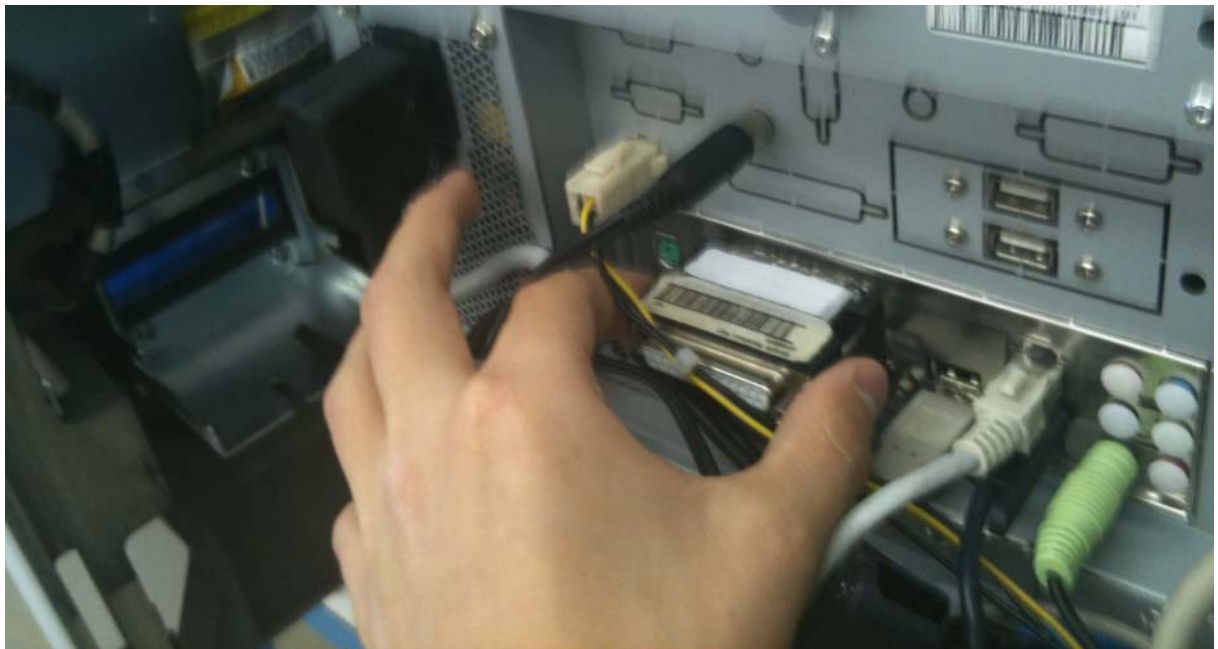

- Pull in the new dongle with the number 3 on the same port

## 2. Update to version 3.01 or higher


You need:

1 x update disk MAX FIRE version 3.01 or higher


- Pull in the update disk in the way like on the photo



- Pull the position from the test switch to „Off“
- Turn on the machine
- The software will be automatically installed on your PC

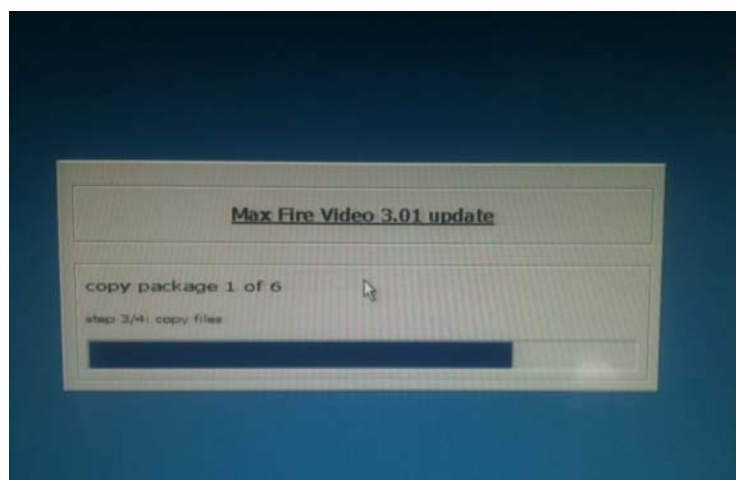


- Wait until this screen appears:

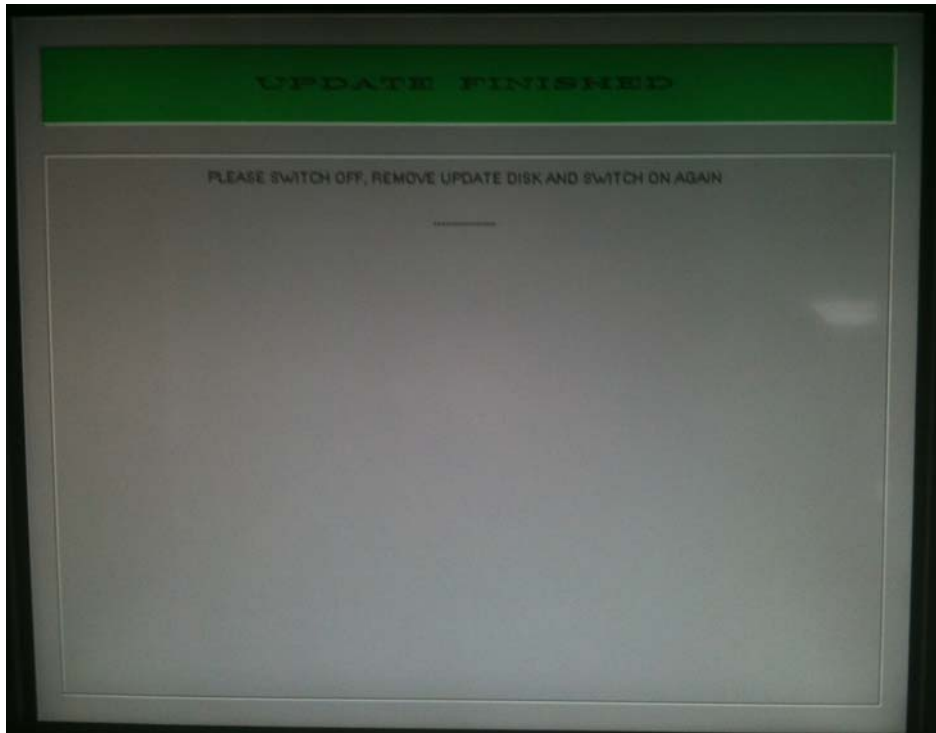

- Turn off the machine after you see this picture on the display
- Remove the update disk and turn on your MAX FIRE again
- The complete hard- and software will be identified and automatically installed for you

After a few minutes the new version 3 will appear on the screen:

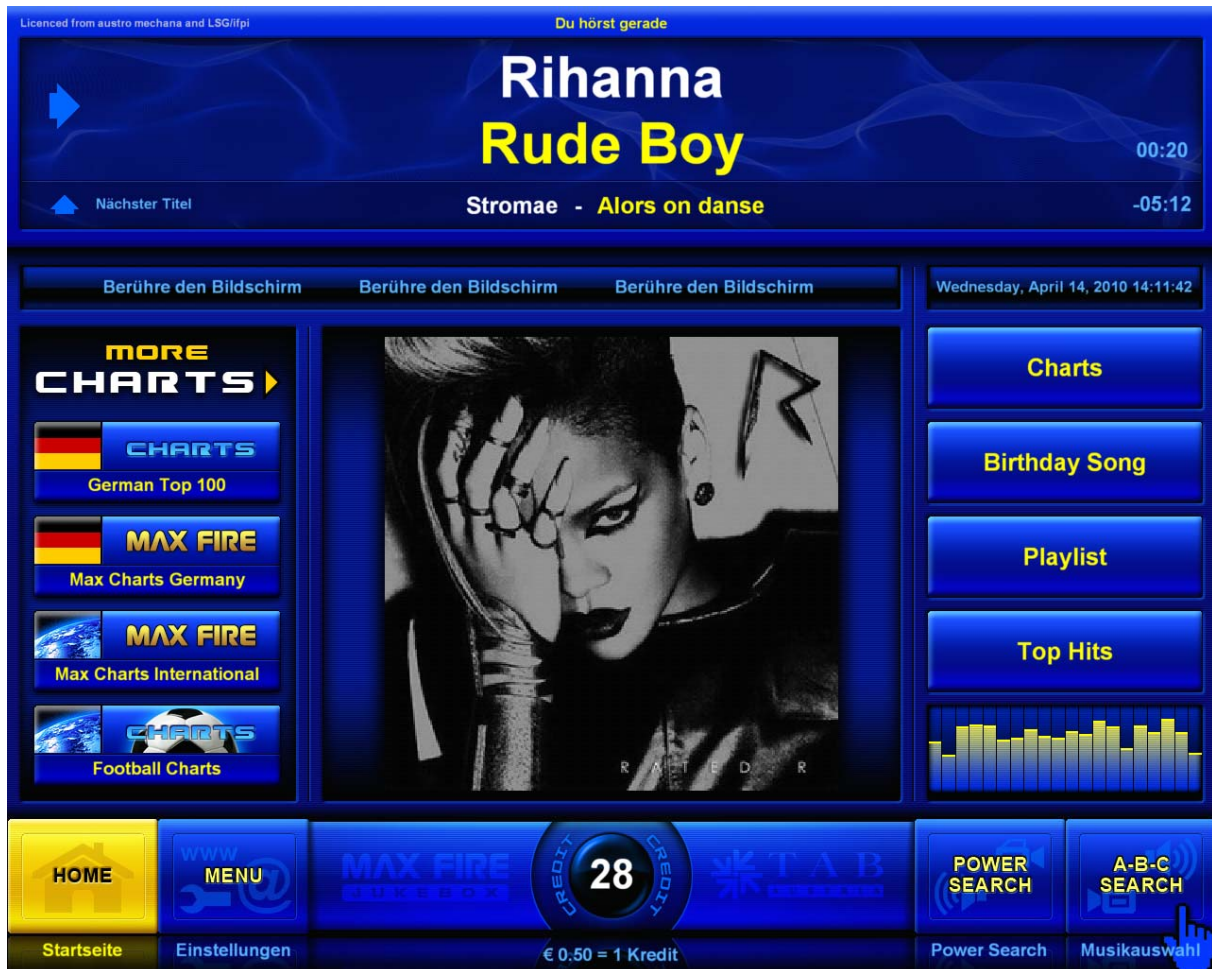

- You have to register the machine new, because you already changed the dongle

### 3. Register of the machine

Turn on the testmode

In the menu Championsnet you can set up the internet settings and register the MAX FIRE Jukebox by TAB – Austria.

<b>Machine/Set-up site</b>		
Machine number	31563	
Name of the establishment	LuckyMax2	
Place/Town	4052	
Address	Adress	
Telephone number	Telefon	
Fax number	Fax	
Email	Email	
Country	Austria	<input type="button" value="change"/>
<b>Connection (Network - Direct)</b>		
Telephone number		
User name		<input type="button" value="change"/>
Time	14:30	
<input type="button" value="Test connection"/>	<input type="button" value="Protocol"/>	<b>ChampionsNet</b>
<input type="button" value="Register ..."/>	<input type="button" value="Email"/>	<input checked="" type="checkbox"/> activate
<input type="button" value="Receive datas"/>	<input type="button" value="WWW"/>	<input type="button" value="Help"/>
<input type="button" value="Receive all datas"/>		<input type="button" value="Back"/>


- Activate ChampionsNet

Please note: The terminal will restart automatically after activating.

If you already had correct internet settings before you updated the machine, please ignore the next pages and continue with page 11.

Choose „change“ at the „Connection“ and you will come to this menu:

- **Provider connection:**
  - Setup the telephone number, user name and password for your connection.
- **Start of transmission**
  - Set the time of the automatically daily-transfer of the Championsnet datas.

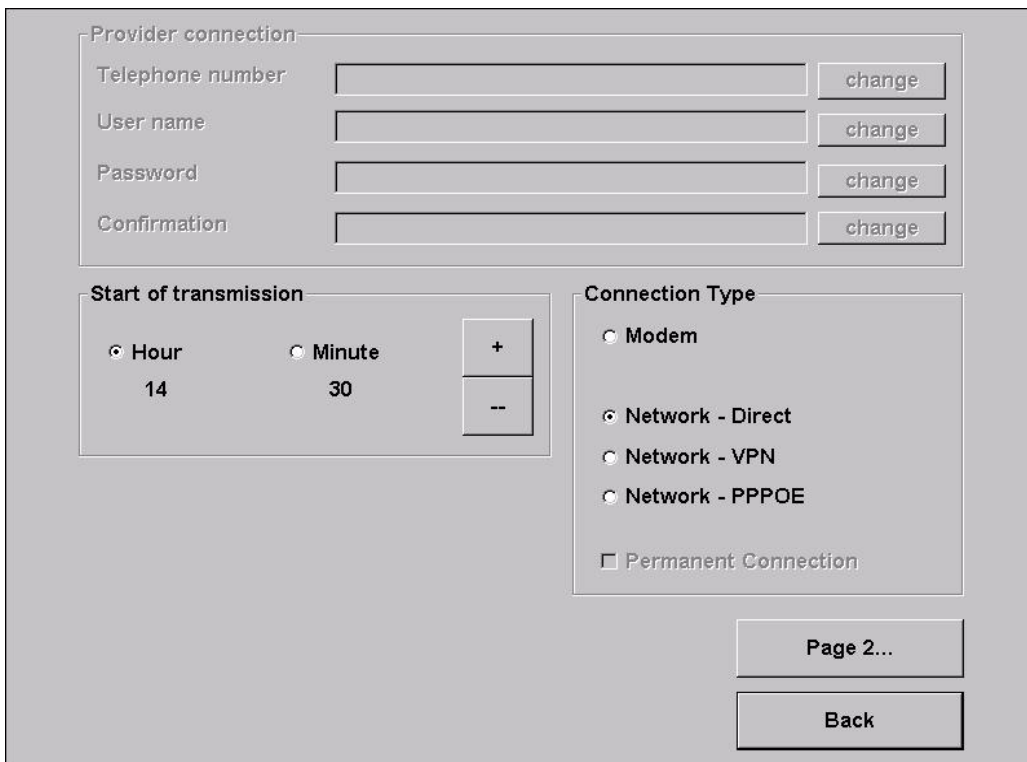

The screenshot shows a network configuration interface with the following sections:

- Provider connection:** A table with four rows: Telephone number, User name, Password, and Confirmation. Each row has a text input field and a 'change' button to its right.
- Start of transmission:** A section with two radio buttons: 'Hour' (selected) and 'Minute'. Below them are the values '14' and '30' respectively. To the right are two buttons: '+' and '--'.
- Connection Type:** A section with four radio buttons: 'Modem', 'Network - Direct' (selected), 'Network - VPN', and 'Network - PPPOE'. Below these is a checkbox labeled 'Permanent Connection'.
- At the bottom right, there are two buttons: 'Page 2...' and 'Back'.

- **Connection Type**

Choose your internet connection. If you choose “Permanent connection”, the machine is always connected to the internet. This is not recommended, because then you can have high internet costs.

- Network Direct (intern network)

There is your device in a intern network. You don't need any datas like telephone number or password. You need only the settings on **page 2**.

Choose the connection **Network Direct** and click the button **Page 2** (see **picture 1.0**). For this datas, please connect your network administrator and fill it in.

- Network – VPN

Users of ADSL have to choose this option. You get your internet setup datas from your provider like number, username and password. Choose the connection **Network – VPN** and fill in the datas. Then go on **page 2 ( picture 1.0)** and there you make the following settings:

- De-activate **Disable DNS**
- Fill in DNS 1
- Fill in DNS 2
- De-activate **Use DHCP**
- Fill in IP-adress
- Fill in Subnet Mask

All this datas you get from your internet provider.

- Network – PPPOE (tie internet)

Users of TDSL or higher are using this option! You get your internet setup datas from your provider like number, username and password. Choose the connection **Network – PPPOE** and fill in the datas. Then go on **page 2 ( picture 1.0)** and there you make the following settings:

- Activate **Disable DNS**
- De-activate **Use DHCP**
- Fill in IP-adress
- Fill in Subnet Mask

All this datas you get from your internet provider.

You are able to connect more machines together and then connect them into the internet. What you need for this is a **hardware router** which is establishing the internet connection for example via DSL. With the network card on-board you configure a local network (see settings **Network Direct**). The PCs will be connected to the router, and the router to the DSL connection.

Picture 1.0

**Proxy / Auto Configuration Script**

Enable Proxy    proxy.intern.tab.at:8080   

Enable Config Script       

**DNS**

Disable DNS   

Domain:       

DNS1:       

DNS2:       

**Network Info**

Use DHCP

IP Address:       

Subnet Mask:       

Gateway:       

**Silverball Max Terminal**

Enable Max Terminal

SB-Max IP:

Fill in here your internet settings. Please contact your internet provider or network administrator when you have problems.

## ***Online Terminal Management***

With the ONLINE TERMINAL MANAGEMENT you are able to advise your machines from your home!

With Online Service you can update the version, send music titles on your MAX FIRE Jukebox, make the payroll and much more **at home**.


With the Online Terminal Management homepage a lot of functions can run with only a few mouseclicks:

- **Online Music Shop**  
Choose music and video files or complete packages and send them to your terminals!
- **Online Service**  
See important datas from your machines at every time.
- **Terminal and license management**  
Here you can manage all your terminals and update your Version online ( **Online Version Plus** )!

You can directly register at <https://service.championsnet.net> or [www.tab.at/otm](http://www.tab.at/otm)

If you register at your first time, you will get your licenses for the first 3 months for free, with the licenses you can activate Online Service. The prices for the download of the music and video files and more details of to OTM service you can find on [www.tab.at](http://www.tab.at) in the **OTM** area.

When all settings are done, you have to **register** your machine into the ChampionsNet.

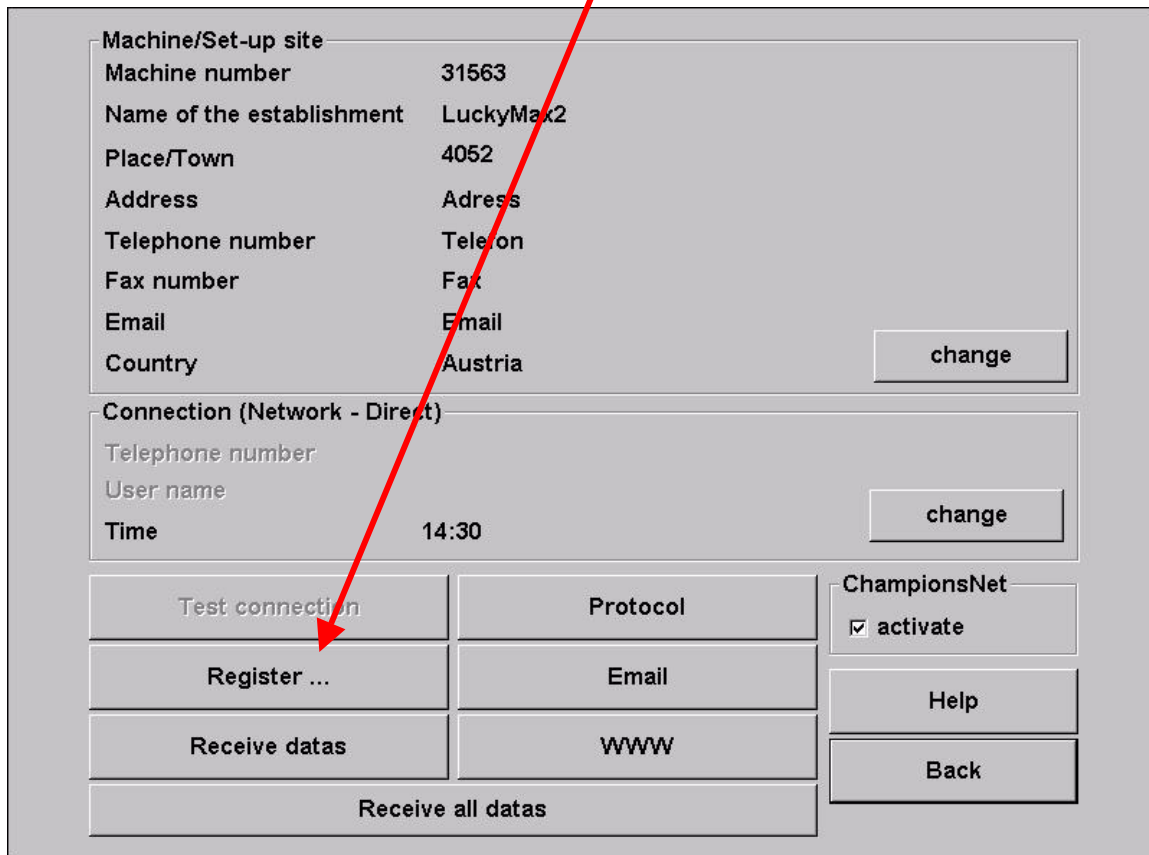

The screenshot shows a registration form with the following sections:

- Machine/Set-up site:** Machine number (31563), Name of the establishment (LuckyMax2), Place/Town (4052), Address (Address), Telephone number (Telefon), Fax number (Fax), Email (Email), Country (Austria). A 'change' button is located to the right of the Country field.
- Connection (Network - Direct):** Telephone number, User name, Time (14:30). A 'change' button is located to the right of the Time field.
- Buttons:** Test connection, Register ..., Receive datas, Receive all datas, Protocol, Email, WWW.
- ChampionsNet:**  activate, Help, Back.

In the registration procedure, the machine is getting accounced to the ChampionsNet server and gets it owns machine number.

For the feature Online Service, you must register at our homepage under OTM and get your own Tan list and licenses. The licenses are free for 3 months. Then in the **testmode** the button **Online Service** is available. Activate Online Service by clicking the button, agree the provisions and fill in a TAN – code.

## Activate Online Service



The screenshot shows a menu titled "MaxFire Video Testmode" with the following information: "MV/A - 1 m ( 1.30 - System Version 320 ) (Serial number: 19000091)" and "Th, 23. February 2006, 09:59 Clock". The menu consists of several buttons arranged in two columns:

General	Basic settings
Machine tests	Hardware settings
Bookkeeping	Game price settings
Advertising text - input	PIN setting
ChampionsNet	Music
Online Service	

Choose „**Online Service**“.

Follow the instructions on the screen and fill in your **Tan code**, device **number (GE....)** and the current stand of your **counter**.

Please make a full data receive after the successful registration of your machine.  
(Championsnet – Receive all data)

If you have questions or problems please contact our Hotline.

### Hotline

TAB - Austria Holding GmbH  
Tel.: +43 - 7229 - 78040 - 250  
Tel. UK.: +44 - 7727 - 421835  
Fax: +43 - 7229 - 78660  
Email: [hotline@tab.at](mailto:hotline@tab.at)  
Internet: [www.tab.at](http://www.tab.at)