



# Technical Info

## **Silverball Max/Karaoke Modeminstallation**


**(if there is no more free PC slot for the installation  
of a modem)**






**Operating steps:**

- Switch off the device, disconnect mains supply!!!
- Open back panell of the Silverball Max/Karaoke.
- Remove wing nut from PC fixing.
- Disconnect ground wire.
- Take out the PC from the housing.
- Remove side panell from PC chassis.
- Remove graphics card (see ill.1).

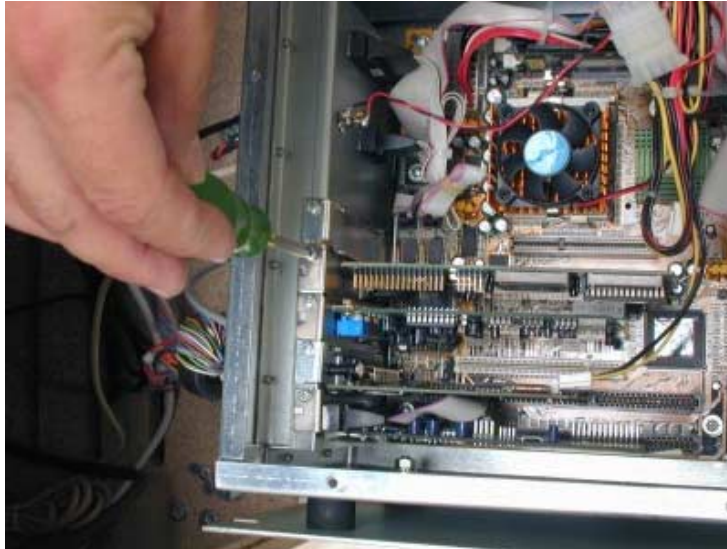

ill.1

- Remove blank panel for the installation of the new AGP graphics card (see ill. 2).

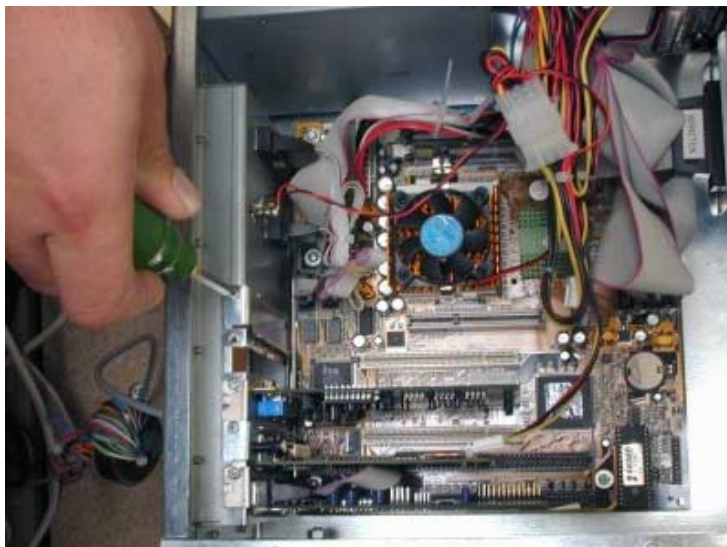

ill. 2



- Insert the modem into the slot of the removed graphics card, take care of a good fitting and screw tight the card (see ill. 3).



ill. 3

- Insert AGP graphics card into the brown AGP slot, take care of a good fitting and screw tight the card (see ill. 4).

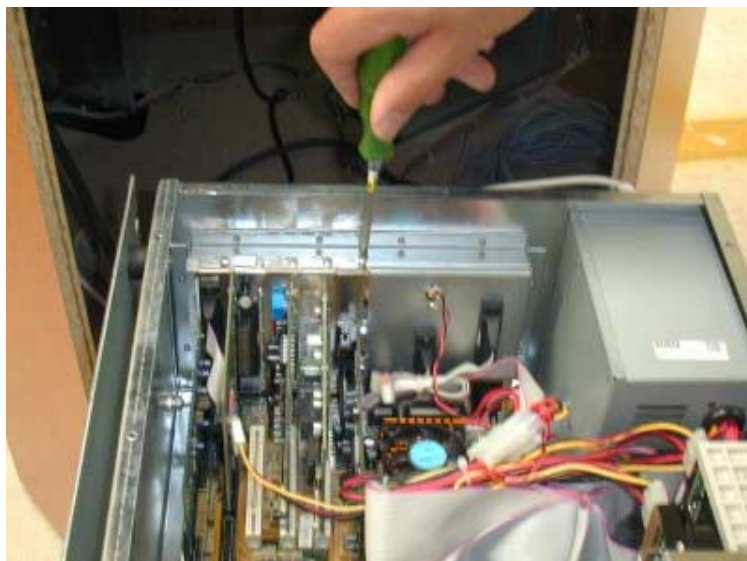


Abb. 4



- Connect the VGA cable to the new graphics card.



- Fix side panel to the PC chassis.
- Built in PC in the Silverball Max/Karaoke, take care that no cables are squeezed and fix the Pc with the two wing nuts.
- Fix ground wire to the PC (Fast-on the top of PC).
- Close back panel.
- Connect mains supply, switch on the device.

**Attention:** Operation of a Silverball Max with a modem (ChampionsNet, Email) requires at least programmversion 5.5.

---

Our hotline is at your service for any further questions.

**Call +43 / 72 29 / 78 0 40 - DW 250**

Mr. Robert Gritzer will be happy to assist you.

