

## Mounting instruction for VDAI cable

Needed parts:


VDAI cable partnumber 360 134 271

Soldering iron, solder, shrinkable tubing




Mount the VDAI cable in the front from the cashbox between the counter and the test switch.

Put the VDAI cable in the hole and fix it with two screws.

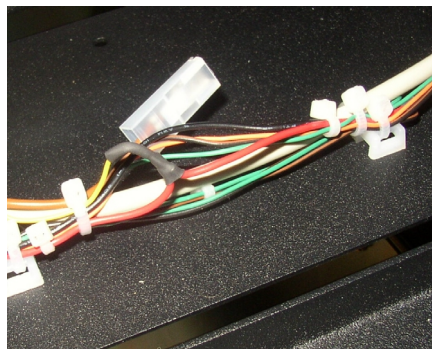

Take the soldering iron and solder the yellow cable (+12V) and the red cable from the counter. The shrinkable tubing that is mounted before soldering is for protect short circuits.

The brown cable with the flat connector is not needed. Fix it with the other cables.

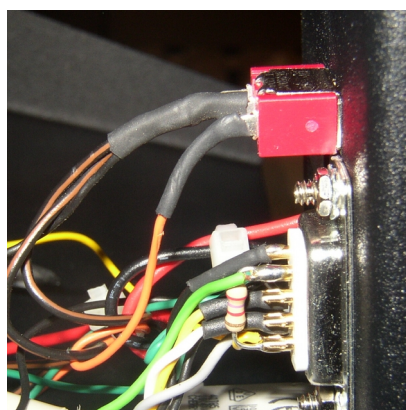

Take the soldering iron and solder the black cable (minus) and the black cable cable from the test switch.

The shrinkable tubing that is mounted before soldering is for protect short circuits.

- Connect the other end from the cable (25 pol.) with the PC.

After mounting the cable and restarting the machine is the VDAI ready to operate.